


## 5.1 ACRYLITE® tube



ACRYLITE® clear  
ACRYLITE® white  
ACRYLITE® Satinice

## 5.1 ACRYLITE® clear

extruded acrylic

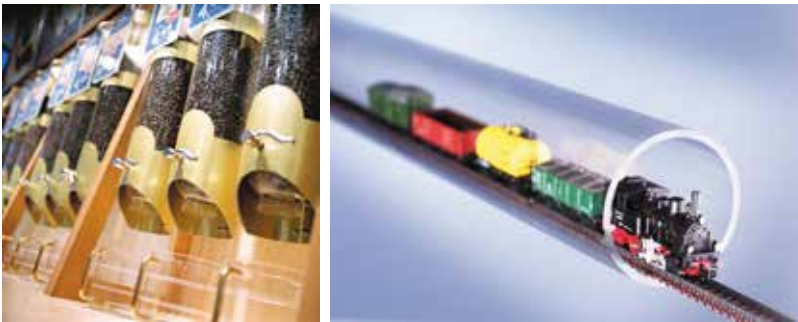




ACRYLITE® acrylic tubes are the clearest on the market today delivering brilliant quality, superior performance, and extended durability. ACRYLITE® tubes are characterized by their flawless optics, perfectly-smooth surface free from striation. The optical clarity of ACRYLITE® tubes allow for a clear view of details making them well suited for store fixtures and point-of-purchase (P-O-P) displays.

Color	Color Number		Diameter in inches		Wall thickness in inches	Quantity delivered, units per				Weight at nom.dim. lb/ft	tolerance in inches	
	old	new	outer	inner		small pack length in feet		large pallet length in feet			outer diameter	wall thickness
						6	8	6	8			
Clear	29070	0A070	2"	1.764"	0.118"	10	10	280	280	0.360	+/- 0.024	+/-0.012
			3"	2.764"	0.118"	8	8	168	168	0.551	+/- 0.031	+/-0.014
			4"	3.764"	0.118"	6	6	90	90	0.742	+/- 0.047	+/-0.014
			6"	5.764"	0.118"	4	4	42	42	1.124	+/- 0.059	+/-0.016
			8"	7.764"	0.118"	2	2	20	20	1.506	+/- 0.079	+/-0.016
			10"	9.724"	0.138"	1	1	12	12	1.888	+/- 0.079	+/-0.018
			12"	11.65"	0.157"	1	1	6	6	3.017	+/- 0.079	+/-0.020

Length tolerance -0/+5 mm

☎ Additional sheet sizes may be available--Please contact Inside Sales for more information.

<b>T</b>	= transparent
<b>TL</b>	= translucent
<b>OP</b>	= opaque
	= standard offering
	= can be manufactured
	= not available

Please Contact Inside Sales  
800.223.2976  
csas@evonik.com  
www.acrylite.net

## 5.1 ACRYLITE® white

extruded acrylic




ACRYLITE® Acrylic Tubes deliver superior performance and extended durability. Dimensional accuracy and excellent circularity with the following benefits:

- Superior UV resistance and weatherability
- 30-year non-yellowing warranty
- Enhanced chemical resistance due to higher molecular weight
- 11X stronger than glass for safe, strong installations
- Half the weight of glass for maximum design flexibility

Color	Color Number			Diameter in inches		Wall thickness in inches	Quantity delivered, units per						Weight at nom.dim. lb/ft	tolerance in inches	
							small pack length in feet			large pallet length in feet				outer diameter	wall thickness
	old	new	industry	outer	inner		6	6.3	8	6	6.3	8			
White	-	WN970	7328	2"	1.764"	0.118"	10	✓	10	280	✓	280	0.360	+/- 0.024	+/-0.012
				3"	2.764"	0.118"	8	✓	8	168	✓	168	0.551	+/- 0.031	+/-0.014
				4"	3.764"	0.118"	6	✓	6	90	✓	90	0.742	+/- 0.047	+/-0.014
				6"	5.764"	0.118"	4	4	4	42	42	42	1.124	+/- 0.059	+/-0.016
				8"	7.764"	0.118"	2	2	2	20	20	20	1.506	+/- 0.079	+/-0.016
				10"	9.724"	0.138"	1	1	1	12	12	12	1.888	+/- 0.079	+/-0.018
				12"	11.65"	0.157"	1	1	1	6	6	6	3.017	+/- 0.079	+/-0.020

Length tolerance -0/+5 mm

☎ Additional sheet sizes may be available--Please contact Inside Sales for more information.

<b>T</b>	= transparent
<b>TL</b>	= translucent
<b>OP</b>	= opaque
	= standard offering
	= can be manufactured
<b>-</b>	= not available

Please Contact Inside Sales  
800.223.2976  
csas@evonik.com  
www.acrylite.net