



SUNLITE® 7 Wall

Multiwall Polycarbonate Sheet



AGRICULTURE



CONSTRUCTION



DIY



ARCHITECTURE



Overview

SUNLITE 7 Wall stretches further the thermal insulation properties of the standard sheet, while retaining its low weight and high impact strength. High light transmission is also maintained to make SUNLITE ideal for varied roofing, wall cladding and glazing applications.

Optional anti-condensation makes SUNLITE 7 Wall ideal for roofing applications in greenhouses and garden centers. SolarSmart™ heat-blocking tints will ideally combine with the sheet's high thermal insulation when used as skylights and provide excellent climate control in closed populated areas and structures.


Main Benefits

- Ultra-high thermal insulation
- Lightweight and impact resistant
- High light transmission
- Excellent structural durability
- Weather and UV resistant
- Blocks virtually all UV radiation
- Easy to handle and install
- High fire performance rating



Typical Applications


- Commercial greenhouses
- Architectural roofing and glazing
- Skylights and sidelights
- Conservatories and sun rooms
- Industrial roofing and glazing
- Residential roofing and glazing
- Covered swimming pools

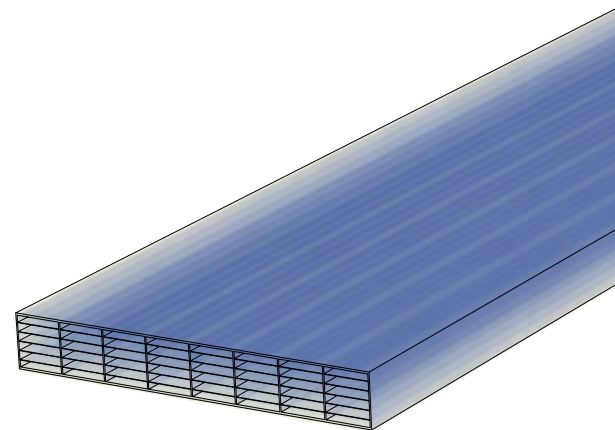

www.palram.com



Structure

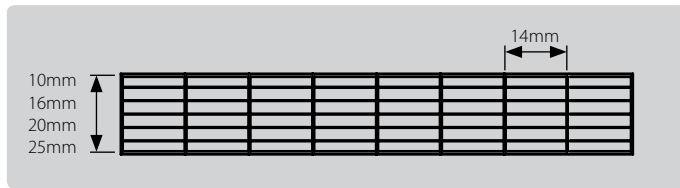

Installation

When specifying SUNLITE sheets, thermal expansion must be accommodated on end and side interfaces, nominally 3mm per meter. For more information please refer to the SUNLITE technical guide available for download on the Palram websites.

Typical Physical Properties

Property	Method**	Conditions	Units	Value			
				10mm	16mm	20mm	25mm
Area weight*			kg/ m ²	1.9	2.55	2.9	3.4
U-value (Ug)	C-236		Watt/m ² ·K	2.3	1.75	1.55	1.39
U-value (Ug) - US Units	C-236		BTU / (hr·ft ² ·°F)	0.40	0.30	0.27	0.24
Standard widths (Closed/Closed)*			mm	700, 980, 1050, 1200, 1250, 2100**			
Standard lengths*			mm	6000, 7000			
Rib Distance			mm	14			
Rib Thickness			mm	0.5			
Light transmission	Clear	D-1003	%	64	64	62	60
	White Diffuser	D-1003	%	45	38	38	38
	Bronze	D-1003	%	29	29	29	22
Min. cold bending radius			m	1.5	2.4	3.5	4.4
Heat deflection temperature (HDT)	D-648	Load: 1.82 MP	°C	135			
Service temperature	Short term		°C	-50 to 120			
	Long term		°C	-50 to 100			
Coefficient of linear thermal expansion	D-696			6.5x10 ⁻⁵			
Tensile strength at yield	D-638	10 mm/min	MPa	62			
Elongation at break	D-638	10 mm/min	%	>90			
Impact falling dart	ISO 6603/1		J	40-400			
Practical thermal expansion/contraction range			mm/m	3			
Flammability ratings	EN 13501-1 2013			B-s1, d0			

* Non-standard options are available upon request. **Width of 7 Wall 10mm is 2096mm instead of 2100mm. **ASTM except where noted otherwise.

SUNLITE® Product Range

Product	Description
SUNLITE®	Standard sheet with UV protection on one side.
SUNLITE® UV2	UV protection on both sides.
SUNLITE® ML	Multi-layered color combinations for special designs.
SUNLITE® Plus	With anti-condensation, for greenhouses.
SUNLITE® Solar Control	Solar metallic reflective heat blocking sheet.
SUNLITE® SLT	Heat blocking and anti-condensation for garden centers.
SUNLITE® CL	Heat blocking sheet for architectural applications
SUNLITE® Smart	See-through sheet with advanced heat-blocking.



PALRAM H.Q.
Tel: +972 4 8459900
Fax: +972 4 8444012
palram@palram.com

PALRAM EUROPE LTD.
Tel: +44 1302 380777
Fax: +44 1302 380778
sales.europe@palram.com

PALRAM AMERICAS
Tel: 610 2859918
Fax: 610 2859928
palramamericas@palram.com



79363 - 08.2015

In as much as Palram Industries has no control over the use to which others may put the material, it does not guarantee that the same results as those described herein will be obtained. Each user of the material should make his own tests to determine the material's suitability for his own particular use. Statements concerning possible or suggested uses of the materials described herein are not to be construed as constituting a license under any Palram Industries patent covering such use or as recommendations for use of such materials in the infringement of any patent. Palram Industries or its distributors cannot be held responsible for any losses incurred through incorrect installation of the material. In accordance with our company policy of continual product development you are advised to check with your local Palram Industries supplier to ensure that you have obtained the most up to date information.

©1998 Palram Industries Ltd. | SUNLITE is a registered trademark of Palram Industries Ltd.

